

970 Stainless Steel Bonnet



Resistant to standard washdown procedures and autoclave sterilization, the 970 is a compact and rugged stainless steel manual bonnet well suited for the Biopharmaceutical and chemical processing industries.

Type: 970

Size Range: ½"-2" (DN15-DN50)

Max Service Pressure:

½ - 1": 200 psig (13.8 bar)

1½ - 2": 175 psig (12.1 bar)

Max Service Temperature:

See reverse side for
Pressure/Temperature curve

Bonnet Material:

316 Stainless Steel

Handwheel Material:


FDA compliant polyarylsulfane (PAS)

Corrosion Resistance:

Resists alcohol, chloride and most caustic washdowns. For specific chemical resistance, consult factory.


Standard Features:

- Adjustable travel stop*
- Visual position indicator
- "O" ring splash seal
- Stainless steel stem
- Bronze compressor
- Sanitary internals (stainless steel stem, bronze compressor)
- Easy assembly and disassembly

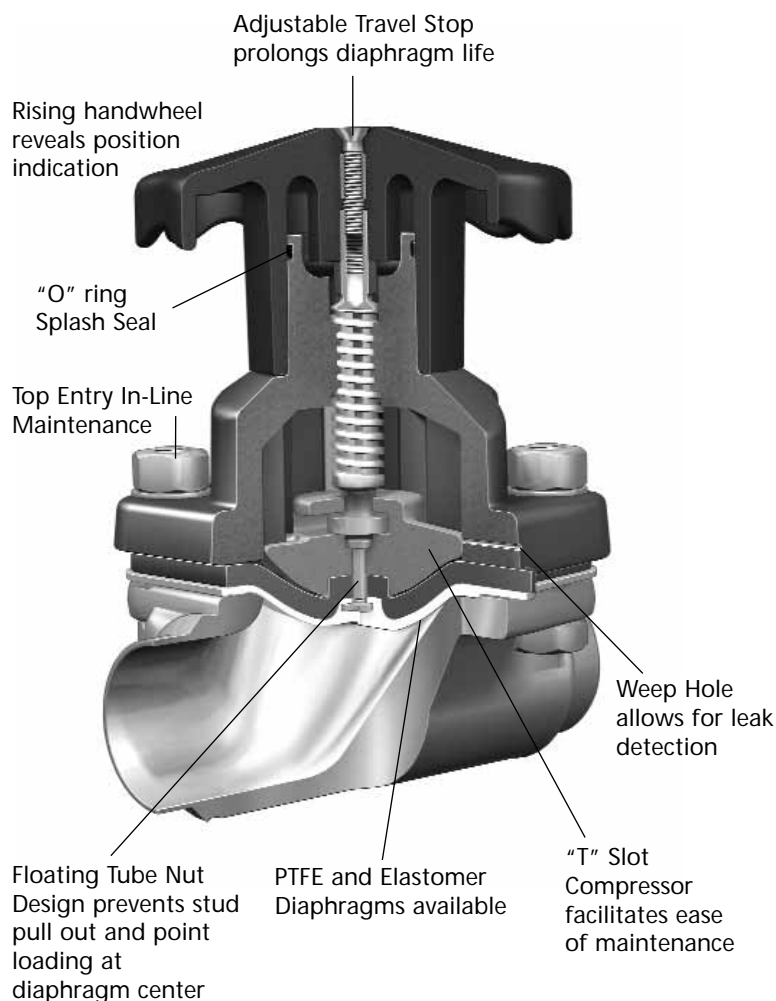

* Patent # 6,241,213

Dimensions

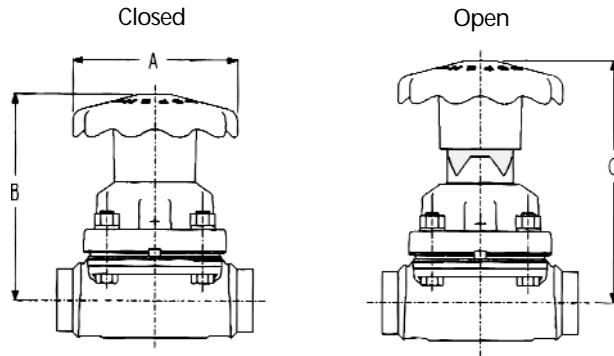

The following table gives the Topworks weight, handwheel diameter and assembly heights from body centerline to top of bonnet assembly in open and closed position.

Valve Size		A		B		C		Topworks Weight	
Inch	DN	Inch	mm	Inch	mm	Inch	mm	lb	kg
0.50	15	2.75	69.9	3.65	92.7	3.90	99.1	0.97	0.44
0.75	20	2.75	69.9	3.89	98.8	4.27	108.5	1.23	0.56
1.00	25	2.75	69.9	4.54	115.3	5.04	128.0	1.67	0.76
1.50	40	5.25	133.3	5.86	148.8	6.67	169.4	5.00	2.27
2.00	50	5.25	133.3	6.49	164.8	7.61	193.3	6.50	2.95

For more information, please contact one of our valve office locations:

Pure-Flo Headquarters
 33 Centerville Road, P.O. Box 6164
 Lancaster, PA 17603-2064 USA
 Phone: +1 (800) 366-1111
 Phone: +1 (717) 509-2200
 Fax: +1 (717) 509-2336
 Website: www.ittpureflo.com
 E-mail: pureflo.custserv@itt.com

Pure-Flo
 110-B West Cochran
 Simi Valley, CA 93065
 Phone: +1 (800) 926-8884
 Phone: +1 (805) 520-7200
 Fax: +1 (805) 520-7205

Pure-Flo
 Richards Street
 Kirkham, Lancashire
 PR4 2HU, England
 Phone: +44-1772-682696
 Fax: +44-1772-686006

© 2006 ITT Corporation
 Industrial & BioPharm Group

8H.POD

Pressure/Temperature Recommendations

